

Improved primary vertex finding for collider detectors

Ferenc Siklér

KFKI Research Institute for Particle and Nuclear Physics, Budapest, Hungary

Abstract

Primary vertex finding for collider experiments is studied. The efficiency and precision of finding interaction vertices can be improved by advanced clustering and classification methods, such as agglomerative clustering with fast pairwise nearest neighbor search, followed by Gaussian mixture model or k-means clustering.

Key words: Vertexing, Silicon

PACS: 29.40.Gx, 29.85.-c

1. Introduction

In this paper one-dimensional vertex finding for minimum bias proton-proton collisions is studied, with a special care for detecting *all* inelastic interactions, even in high pile-up. For the procedure clean primary particles are needed with good estimate of their starting longitudinal coordinate z , at the point of closest approach to beam line, as well as its standard variation σ_z . The selection of particles is often based on the value of the impact parameter d of the track and its estimated standard deviation σ_d , e.g. requiring $d < 3\sigma_d$ (beam spot constraint).

Finding the vertex or vertices of inelastic interactions in a collider is essential for physics analyses. The aim is to identify primary vertices efficiently with low background. Several methods and algorithms have been developed in the past.

One of them [1] works well for single, high multiplicity events (e.g. heavy-ion collisions). It first estimates the vertex position by the centroid of z coordinates of hits left in the detector. It makes use of the correlation between the hits in separate layers and estimates the location of the vertex.

Another one [2] takes all reconstructed tracks which are compatible with the beam spot. The mode of their z coordinates is used as vertex candidate. Tracks not compatible with the vertex are discarded, the rest is used for an adaptive multi-vertex fit. The remaining tracks are used to find a new vertex candidate. The procedure continues until a minimum of two tracks compatible with a common vertex is reached. The method has very high efficiency to find the correct vertex in a sample of $t\bar{t}$ events.

This article is organized as follows: Sec. 2 introduces a standard method of primary vertex finding, defines some performance measures and discusses its optimization. Sec. 3 shows the possible application of hierarchical clustering, while Sec. 4 deals with more sophisticated methods, such as Gaussian mixture models and k-means clustering. The details of the Monte Carlo simulation are given in Sec. 5. The comparisons of performance and timing are shown in Sec. 6. This work ends with conclusions.

2. The standard method

In a third method [3] primary vertex candidates are obtained by clustering selected tracks according to their z coordinate. The so called divisive method looks for large intervals without tracks and divides the z axis into several regions. For each region the vertex position is computed with a weighted average of all compatible tracks. Tracks not compatible with that average vertex position are discarded, but they are recovered to make a new vertex candidate.

Email address: sikler@rmki.kfki.hu (Ferenc Siklér)

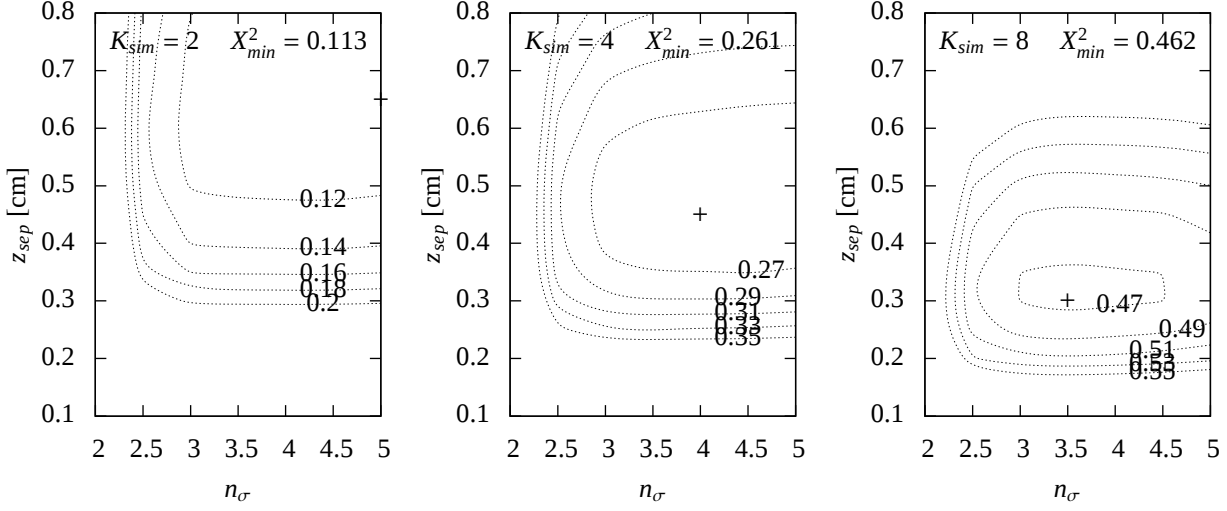


Figure 1: Optimization of the standard method for $n_{min} = 2$ for several K_{sim} values. The contour lines of X^2 are drawn, the place (+) and value of the minimum are indicated.

First, the tracks are ordered according to increasing z value. The ordered list is scanned to form a cluster until at least n_{min} consecutive tracks separated by more than z_{sep} are found, at which point another cluster is built. The position of each of these primary vertex clusters is determined iteratively. A cleaning procedure is applied, rejecting the tracks farther from the estimated primary vertex position z_k than n_σ standard deviations ($|z - z_k| \leq n_\sigma \cdot \sigma_z$). The positions of the primary vertices are recomputed with the remaining tracks. The procedure iterated until each remaining track is compatible with its associated cluster according to the above criterion.

For specific signal events the settings $n_\sigma = 5$, $z_{sep} = 50 - 500 \mu\text{m}$ and $n_{min} = 2$ appeared to be most successful. The efficiency for reconstructing and correctly tagging the primary vertex of the signal event depends on the number of charged tracks produced at the vertex, and for low luminosity it ranges from 76% to 99% depending on the signal process studied.

In the following comparisons the above mentioned method will be used as standard vertex finder since it is best suited for finding multiple vertices opposed to others (Sec. 1) which search only for the signal vertex.

2.1. Measures of performance

A vertex is associated to another vertex if more than half of its tracks are shared. This way a reconstructed (simulated) vertex can be associated to a simulated (reconstructed) vertex: the number of possible associations is zero or one. A simulated vertex is reconstructed n times if there are n reconstructed vertices which are associated to it. The *efficiency* gives the fraction of simulated vertices which are at least once reconstructed. The *lost* vertex rate shows the fraction of simulated vertices which are not reconstructed. The *split* vertex rate shows the fraction of simulated vertices which are more than once reconstructed. A reconstructed vertex is a *fake* if it has no associated simulated vertices. A reconstructed vertex is *merged* if it has more than one associated simulated vertices. These quantities can be studied as a function of fixed or Poisson distributed event-by-event pile-up.

2.2. Optimization of the standard method

The standard algorithm can be optimized by choosing n_{min} , n_σ and z_{sep} such that the performance of vertex finding is best. As it was presented in Sec. 2 the roles of the parameters are

- n_{min} : minimum number of tracks required to form a cluster. In order to have low bias, it is reasonable to look at settings $n_{min} = 2$ and 3.
- n_σ : a track is compatible with a vertex if it is closer than n_σ times the estimated standard deviation of z .

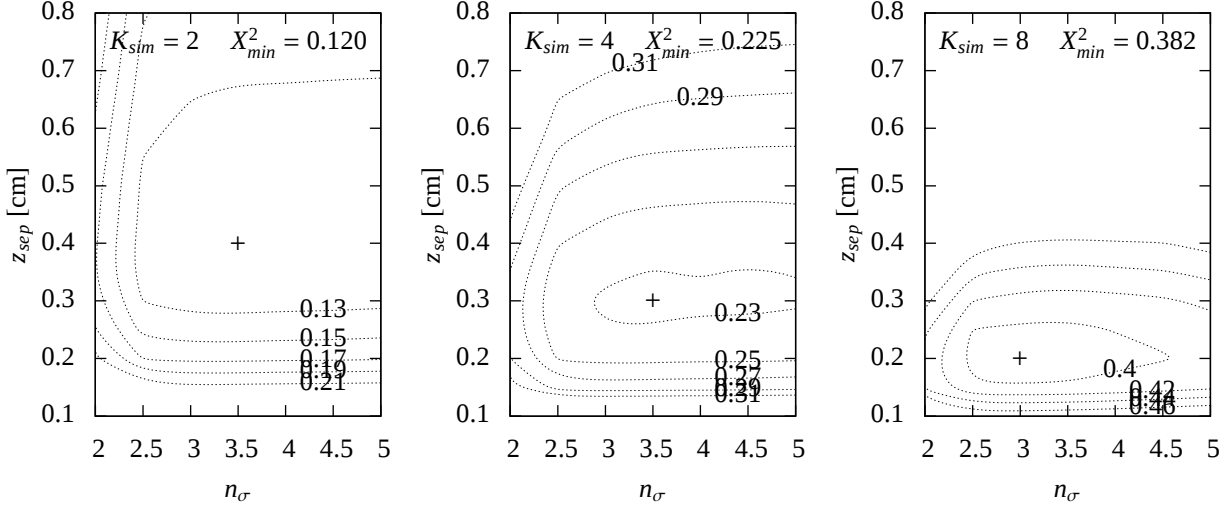


Figure 2: Optimization of the standard method for $n_{min} = 3$ for several K_{sim} values. The contour lines of X^2 are drawn, the place (+) and value of the minimum are indicated.

- z_{sep} : maximum distance between two adjacent tracks that belong to the same initial cluster.

The measure of goodness, the merit function X^2 to minimize, can be chosen as the sum of the fractions of lost and split simulated vertices and that of the fake and merged reconstructed vertices:

$$X^2 = \left\langle \frac{K_{lost} + K_{multi}}{K_{sim}} + \frac{K_{fake} + K_{merged}}{K_{rec}} \right\rangle.$$

The X^2 values for several settings, using 10^4 inelastic proton-proton events, were calculated on a grid: $K_{sim} = 1, 2, 4$ and 8 ; $n_\sigma = 2, 2.5, \dots, 5$; $z_{sep} = 0.1, 0.15, \dots, 0.8$ cm; $n_{min} = 2, 3$. The obtained contour lines and the places of the minima are shown in Fig. 1 ($n_{min}=2$) and Fig. 2 ($n_{min}=3$). The best values are also given in Table 1. Both the optimal n_σ and z_{sep} depend on the real vertex multiplicity K_{sim} . In case of a single simulated vertex a big n_σ and z_{sep} is needed for good reconstruction. It turns out that $n_{min}=3$ gives comparable or better performance for all K_{sim} values than those with $n_{min}=2$. The setting

$$n_{min} = 3, \quad n_\sigma = 3.0, \quad z_{sep} = 0.3 \text{ cm}$$

is an acceptable compromise. Hence for the standard method these values were used in the following studies.

3. Hierarchical clustering

Since the track multiplicities of vertices greatly vary, for efficient classification (Sec. 4) the precise and unbiased designation of cluster centers is essential. The most widely used methods for hierarchical clustering are agglomerative methods [4]. They start by connecting individual data points into small clusters, then connect those clusters, and so forth. The pairwise nearest neighbor method (PNN) using weighted averages proved to be a highly successful method for agglomerative clustering. In this work an advanced implementation, the fast pairwise nearest neighbor method (fPNN) [5], was used where the list of closest neighbors is kept and updated.

The distance d of two tracks i and j is defined as

$$d^2 = \frac{(z_i - z_j)^2}{\sigma_i^2 + \sigma_j^2}.$$

Table 1: Optimized parameters for the standard method. Best n_σ , z_{sep} and minimal X^2 values for settings $n_{min} = 2$ and 3 using 1, 2, 4 or 8 simulated vertices.

n_{min}	K_{sim}	n_σ	z_{sep} [cm]	X^2_{min}
2	1	big	big	small
	2	5.0	0.65	0.113
	4	4.0	0.45	0.261
	8	3.5	0.30	0.462
3	1	big	big	small
	2	3.5	0.40	0.120
	4	3.5	0.30	0.225
	8	3.0	0.20	0.382

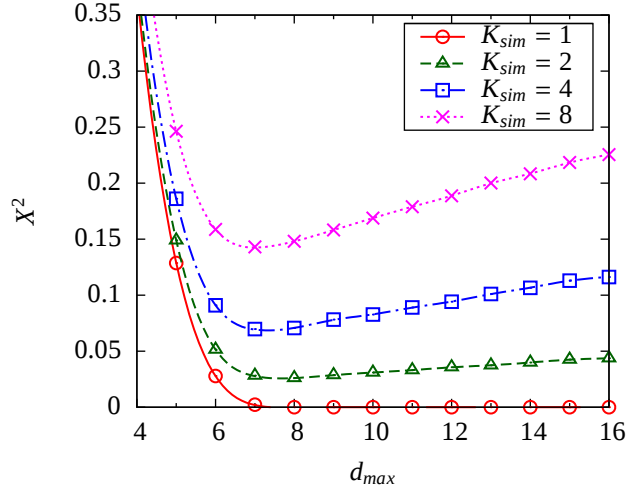


Figure 3: Optimization of the agglomerative clustering method for several simulated vertex multiplicities. The lines are drawn to guide the eye.

Note that d is essentially the log-likelihood of the event that the two tracks belong to the same vertex. The clustering starts with all reconstructed tracks, each of them being a cluster with a single track. At each step the clusters with the smallest distance are found and the two clusters are joined:

$$z = \frac{z_i/\sigma_i^2 + z_j/\sigma_j^2}{1/\sigma_i^2 + 1/\sigma_j^2}, \quad \sigma^2 = \frac{1}{1/\sigma_i^2 + 1/\sigma_j^2}.$$

The procedure is repeated until only some K clusters remain and the resulting vertex positions are passed to other classification methods for further refinement. More on the selection of optimal K value is given in Sec. 4.

The K value can also be chosen, and the clustering can also be stopped, if at a step the smallest distance gets bigger than a given number d_{max} . The merit value X^2 as function of d_{max} for several simulated vertex multiplicities $K_{sim} = 1, 2, 4$ and 8 is shown in Fig. 3. The choice of $d_{min} \approx 8$ appeared to give the best result. For performance plots of this method see Sec. 6 (labeled with fPNN).

Another agglomerative clustering method, neighbor joining, was also tested but provided much poorer results and it was not studied further.

4. Classification with unsupervised learning

4.1. Gaussian mixture model

Gaussian mixture models are examples of classification by unsupervised learning where the solution is achieved by series of expectation and maximization steps [4]. We have N tracks with estimated longitudinal coordinates z_n at their closest approach to the beam-line and their expected standard deviations σ_n ($n = 1, 2, \dots, N$). If the number of interaction vertices K in a bunch crossing is *given*, the task is to find the means of the longitudinal coordinates $\hat{z}_k$ and their weights, fraction of attached to all tracks, $\hat{P}(k)$ of each vertex ($k = 1, 2, \dots, K$).

The likelihood of finding the tracks at positions z_n is a product

$$\mathcal{L} = \prod_n P(z_n) \quad (1)$$

or a sum

$$\chi^2 = -2 \log \mathcal{L} = -2 \sum_n \log P(z_n) \quad (2)$$

where $P(z_n)$ is the so called the mixture weight for track n . It can be split into contributions from each vertex

$$P(z_n) = \sum_k P(z_n, \sigma_n | \hat{z}_k) \hat{P}(k)$$

where the conditional probability is a Gaussian

$$P(z_n, \sigma_n | \hat{z}_k) = \frac{1}{\sigma_n \sqrt{2\pi}} \exp \left[-\frac{(z_n - \hat{z}_k)^2}{2\sigma_n^2} \right].$$

The probability that track n came from interaction vertex k is

$$p_{nk} = \frac{P(z_n, \sigma_n | \hat{z}_k) \hat{P}(k)}{P(z_n)}$$

where p is also known as the responsibility matrix. In summary, in the expectation step p can be calculated for given values of means $\hat{z}_k$ and weights $\hat{P}(k)$ for all vertices. The procedure starts by using the results of agglomerative clustering for K vertices (Sec. 3). During the maximization step, these means and weights are estimated from p as

$$\hat{z}_k = \frac{\sum_n p_{nk} z_n}{\sum_n p_{nk}} \quad \hat{P}(k) = \frac{\sum_n p_{nk}}{N}.$$

The expectation step followed by the minimization step will increase the likelihood value, or decrease χ^2 . Thus repeated iterations will converge to an extremum. In practice the process can be stopped if χ^2 decreased only by a small amount or the number of iterations exceeded some limit. For performance plots of this method see Sec. 6 (labeled with fPNN+GaussM).

4.2. The k-means clustering

The k-means clustering is a simplification of the Gaussian mixture model [4]. Tracks do not get assigned to clusters in a probabilistic way but they can be attached to one and only one of them. In the expectation step the tracks are assigned to the cluster k which has the closest mean μ_k . In the minimization step the means μ_k are re-estimated using the averaged z-coordinate of tracks assigned to cluster k . The process is stopped if the expectation step does not change the assignment of any track. The k-means clustering is simpler than the Gaussian mixture model, it is fast and converges rapidly, with somewhat reduced performance. For performance plots of this method see Sec. 6 (labeled with fPNN+kMeans).

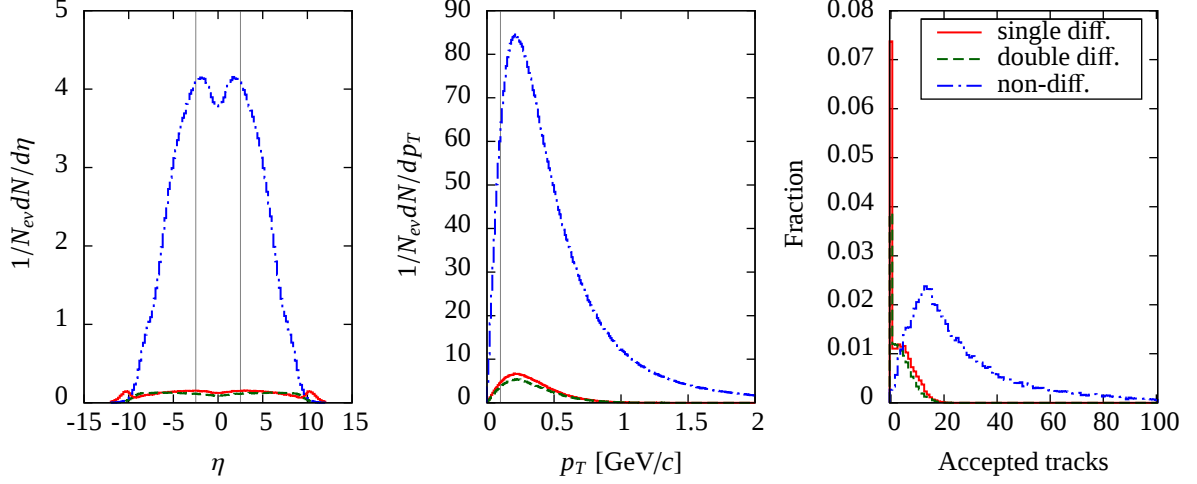


Figure 4: Left and center: Pseudo-rapidity and transverse momentum distributions of produced charged particles from inelastic proton-proton collisions at $\sqrt{s} = 10$ TeV according to Pythia 6.4. The assumed acceptance window ($|\eta| < 2.5$ and $p_T < 0.1$ GeV/c) is indicated by the grey vertical lines. The event-by-event number distribution of accepted particles are shown right. The three curves correspond to contributions from single-, double diffractive and non-diffractive processes.

4.3. Estimating the number of primary vertices

Since the number of primary vertices K is not known in advance, it has to be determined from data. Starting with $K = 1$, the value of $\chi^2(K)$ as function of K can be examined. If adding a new vertex decreases χ^2 by some substantial amount, the addition can be regarded successful, otherwise the vertices found in the previous step should be retained.

If there were indeed K real vertices in the bunch crossing, the expected value of $\widehat{\chi^2}(K)$ assuming distinct vertices, that is, non-overlapping clusters of tracks, is

$$\widehat{\chi^2}(K) \approx \sum_n \frac{(z_n - \widehat{z}_k)^2}{\sigma_n^2} - 2 \sum_k n_k \log \frac{n_k}{N} \quad (3)$$

where n_k are the number of tracks associated to the vertices as result of the optimization described in Sections 3 and 4. $\widehat{\chi^2}$ has a shifted chi-squared distribution with N degrees of freedom

$$P(\widehat{\chi^2}|K) = f(\widehat{\chi^2} - \lambda; N)$$

where the shift is

$$\lambda = 2 \left(N \log N - \sum_k n_k \log n_k \right).$$

The task is to compare the merit values based on individual track probabilities (Eq. (2)) and the above calculated expected values (Eq. (3)). If $\chi^2(K)$ is compatible with $\widehat{\chi^2}(K)$ with some confidence, K can be regarded as a good estimate of the number of interaction vertices. A sensible stopping condition is

$$P(\chi^2 - \lambda; N) > 10^{-3}.$$

4.4. Use of priors

If the shape of the interaction region or the interaction rate is unknown, we have no additional information, the priors are constant. Otherwise the z-distribution of vertices $P(\widehat{z}_k)$ and the number distribution of primary vertices

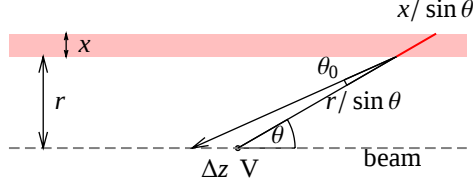


Figure 5: The effect of multiple scattering. The first silicon layer is shown by the thick horizontal band (not on scale), the position of the primary vertex is indicated by V. For details see the text in Sec. 5.1.

$P(K|K \geq 1)$ can be incorporated into the optimization. Their distributions are well described by a Gaussian and a Poissonian, respectively:

$$P(\hat{z}_k) = \frac{1}{\sigma_{IR} \sqrt{2\pi}} \exp \left[-\frac{(\hat{z}_k - z_{IR})^2}{2\sigma_{IR}^2} \right]$$

$$P(K|K \geq 1) = \frac{\mu^K e^{-\mu}}{K!} \frac{1}{1 - e^{-\mu}}$$

where z_{IR} and σ_{IR} are the mean and the standard deviation of the longitudinal coordinate of the interaction region, μ is the average number of interaction vertices per bunch crossing. The contributions of the priors corresponding to the interaction region (IR) and the number of reconstructible inelastic interactions (int) to χ^2 are

$$\Delta\chi_{IR}^2 = \sum_k \frac{(z_k - z_{IR})^2}{\sigma_{IR}^2}$$

$$\Delta\chi_{int}^2 = 2 [\mu + \log(1 - e^{-\mu}) + \log K! - K \log \mu].$$

5. Simulation

Inelastic proton-proton collisions were simulated using the Pythia event generator [6] at a center-of-mass energy of 10 TeV (including single-, double-diffractive and non-diffractive events). In order to take into account the limited acceptance of central detectors, only those primary charged particles were used for vertex finding which had $|\eta| < 2.5$ and $p_T > 0.1$ GeV/c. The shape of the interaction region in z was approximated by a Gaussian with 5 cm standard deviation. The distribution of pseudo-rapidity, p_T and event-by-event multiplicity are shown in Fig. 4.

At least two compatible tracks are required to form an interaction vertex candidate ($n_k \geq 2$) which eliminates most of the background coming from low p_T spiralling particles looping in the strong magnetic field, decay products of weakly-decaying long lived resonances (K_S^0 , Λ and $\bar{\Lambda}$), γ conversions, and particles from secondary interactions.

5.1. Resolution of z position

The resolution of z is governed by the local position resolution of the closest situated (pixel) silicon detectors and the effect of multiple Coulomb scattering.

$$\sigma_z^2 = \sigma_{pos}^2 + \sigma_{ms}^2.$$

In this study $\sigma_{pos} = 50 \mu\text{m}$ is assumed. The expected standard deviation of z due to multiple scattering can be written in the form

$$\sigma_{ms} = \frac{r}{\sin^2 \theta} \theta_0 = \frac{r}{\sin^2 \theta} \frac{13.6 \text{ MeV}}{\beta pc} \sqrt{\frac{x}{X_0 \sin \theta}} \approx$$

$$\approx \frac{100 \mu\text{m}}{p_T c} \cosh^{3/2} \eta$$

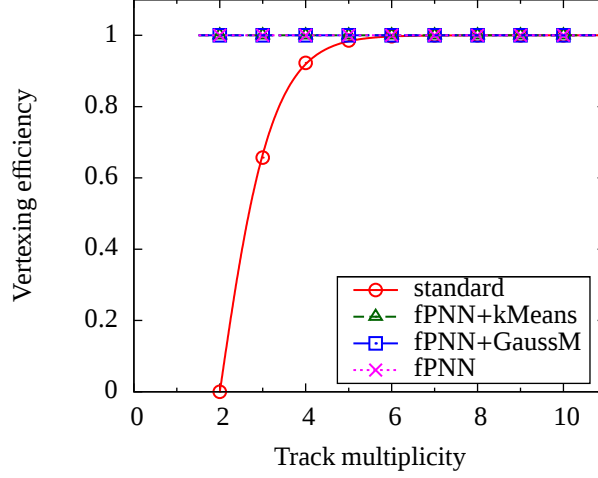


Figure 6: Efficiency of vertex finding for single events, as a function of track multiplicity, for several discussed vertex finding methods. The line is a binomial fit to the values corresponding to the standard algorithm.

where θ is the polar angle, θ_0 is the standard deviation of the multiple scattering angle, r is the radial distance of the first pixel layer, x/X_0 is the thickness of the layer in radiation length units. For detailed derivation see Fig. 5. Here the values $r = 4$ cm, $x/X_0 = 3\%$ were used.

6. Results

The performance of several discussed vertex finding methods was compared using 10^5 inelastic events. Only those simulated and reconstructed vertices were taken into account which had at least two tracks.

The efficiency of vertex finding for single events, as a function of track multiplicity, for several discussed vertex finding methods is shown in Fig. 6. In case of the standard algorithm the values were fitted with a binomial distribution, giving a true probability $p_{\text{standard}} = 0.87$.

The result as a function of vertex multiplicity in a bunch crossing is shown in Fig. 7. The left column deals with simulated vertices by showing the fraction lost, singly reconstructed and split ones, from top to bottom. The fraction of lost vertices increases approximately linearly with vertex multiplicity K_{sim} , the improved methods have about 3 times fewer lost vertices. The rate of split vertices is flat. While it is at 1% for the standard method, it drops to 0.1% for the proposed ones. The right column takes into account reconstructed vertices by looking at the fraction of fake, correctly found and merged ones, from top to bottom. The fraction of fake vertices is again increases approximately linearly with reconstructed vertex multiplicity K_{rec} , the improved methods have about 5 times fewer fakes. The rate of merged vertices has a linear behavior which is similar for both standard and improved methods. It can be understood since with increasing multiplicity the vertices get closer and it is more and more difficult to separate them. It is clear that the improved methods have better performance in all examined variables. The fPNN search, the k-means clustering and the Gaussian mixture model all provide very similar values.

The resolution of the longitudinal coordinate of the reconstructed primary vertex as a function of track multiplicity is shown in Fig. 8-left. It is practically independent of the vertexing method used and scales as $N^{-0.81}$. (The small difference for $N=5$ is due to the high efficiency of the proposed methods at very low track multiplicity.) A measure of efficiency, the average fraction of lost vertex tracks, as a function of vertex multiplicity is plotted in Fig. 8-right. It shows that even in case of a single vertex, the standard method loses about 10% of the tracks, while the improved ones keep all of them. The loss increases approximately linearly with K_{sim} multiplicity, the improved methods have about 4 times fewer lost vertex tracks.

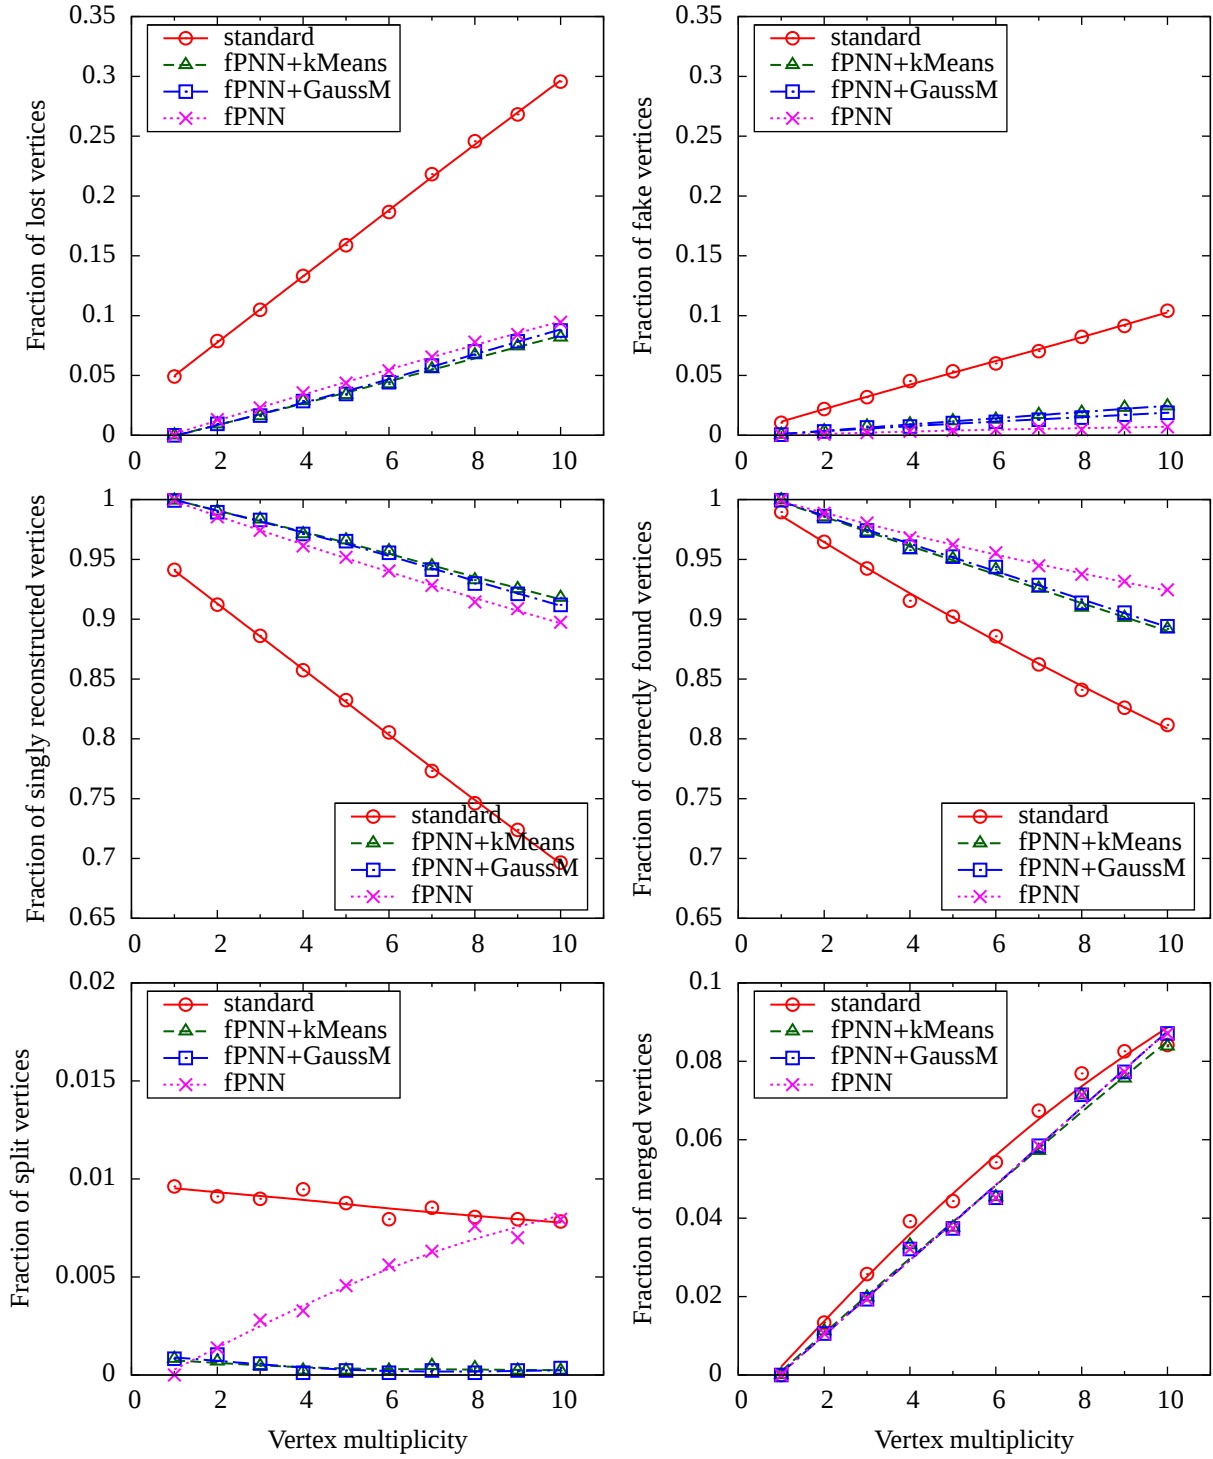


Figure 7: Comparison of performance for several discussed vertex finding methods. The left column deals with simulated vertices, by showing those which have zero (lost vertex), one (singly reconstructed) and more than one (split vertex) associated reconstructed vertices. The right column takes into account reconstructed vertices, by looking at those which have zero (fake vertex), one (correctly found) or more than one (merged vertex) associated simulated vertices. The lines are drawn to guide the eye.

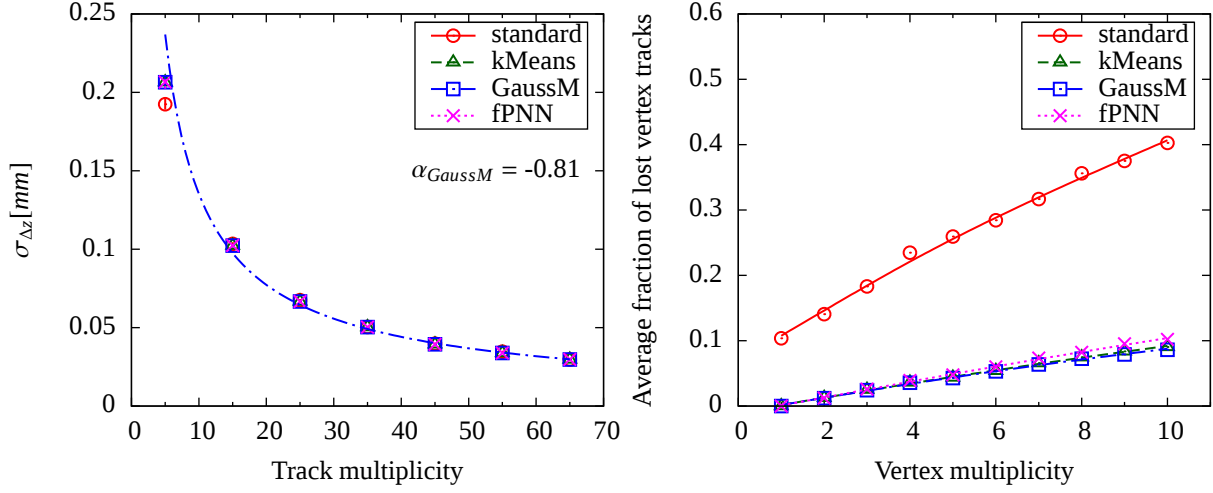


Figure 8: Left: Resolution of the longitudinal coordinate of the reconstructed primary vertex as a function of track multiplicity in case of single events, for several discussed vertex finding methods. The line is a power-law fit to the values corresponding to the Gaussian mixture algorithm, its exponent α_{GaussM} is indicated in the figure. Right: Average fraction of lost vertex tracks as a function of vertex multiplicity, for several discussed vertex finding methods. The lines are drawn to guide the eye.

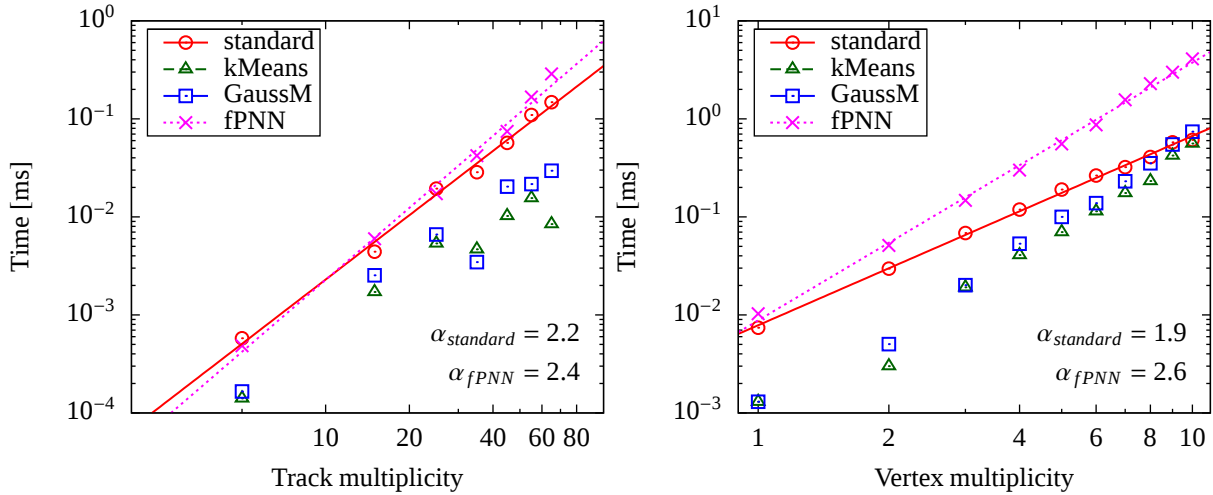


Figure 9: Processing time per bunch crossing for several discussed methods and processes on a 1.6 GHz CPU. Left: single events, as a function of track multiplicity. Right: multiple events, as a function of vertex multiplicity. The exponents of the power-law fits for the standard ($\alpha_{standard}$) and fPNN methods (α_{fPNN}) are indicated in the figure.

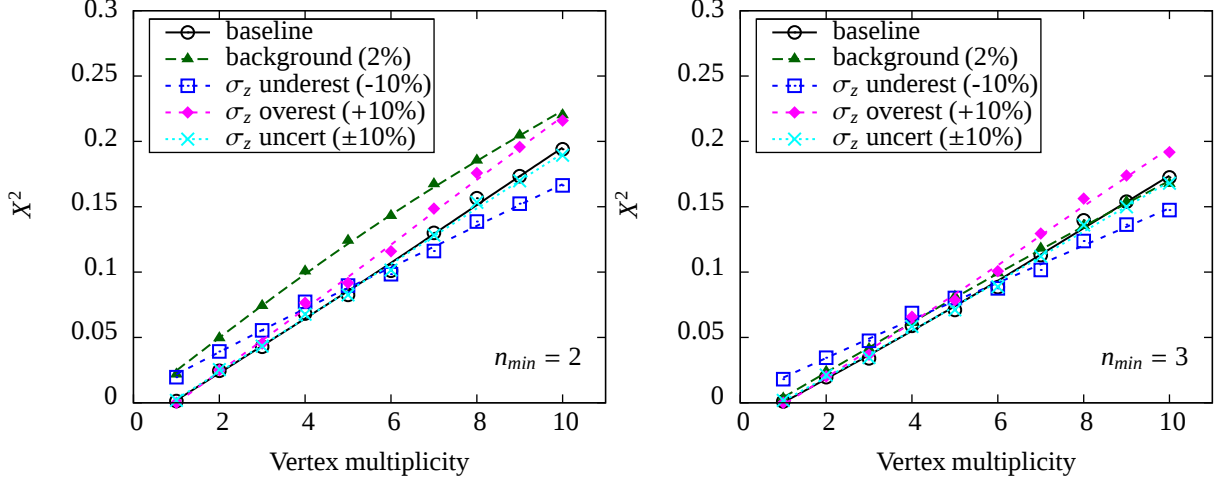


Figure 10: Sensitivity of the Gaussian mixture method to background tracks. Comparison of the baseline, underestimated or overestimated σ_z , and uncertain σ_z scenarios as a function of vertex multiplicity, based on the merit value X^2 , for two n_{min} settings (2 or 3).

6.1. Timing

For online applications and fast event reconstruction it is important to control the timing of vertex finding. Processing times per bunch crossing for several discussed methods and processes are shown in Fig. 9. Measured values on a 1.6 GHz CPU are given for the standard method, the fPNN clustering, as well as for the k-means and Gaussian mixture models. In case of the improved sequence, both for single events and pile-up, the largest contribution to timing comes from the clustering phase. For single events (Fig. 9-left), the required time per interaction has a power-law dependence on the track multiplicity, the exponents being similar for the standard ($\alpha_{standard} = 2.2$) and the improved method ($\alpha_{fPNN} = 2.4$). The processing times are essentially the same. In case of multiple events per bunch crossing (Fig. 9-right), pile-up, the power-law scaling is steeper for the improved method ($\alpha_{fPNN} = 2.6$) with respect to the standard one ($\alpha_{standard} = 1.9$). This amounts to a 5 times slower processing in case of 10 simulated vertices, where the total time per bunch crossing is 4 ms, but that is still acceptable.

6.2. Sensitivity

The stability of the results was also tested, since the performance of the proposed method can be sensitive to

- the amount of background tracks compatible with the beam-line (see Sec. 5). In the test their number was set to 2% of the primary multiplicity.
- systematic shift in the estimated standard deviation of the z value of tracks. In the test σ_z was uniformly increased and decreased by 10%.
- random shifts in the estimated standard deviation of the z value of tracks. In the test σ_z was track-by-track varied according to a normal distribution with 10% standard deviation.

The comparisons based on the merit value X^2 are shown in Fig. 10-left. In case of the addition of background tracks the slightly worse performance originates from the increase of fake vertex rate. The underestimation of σ_z leads to increased fake and split vertices for lower vertex multiplicity. The overestimation of σ_z gives higher rate of lost and merged vertices for higher vertex multiplicity. The effects can be compensated by increasing the parameter n_{min} to 3 (Fig. 10-right). Random shifts in σ_z have practically no effect on the performance.

7. Conclusions

It was shown that finding interaction vertices for collider detectors can be improved by using advanced clustering and classification methods, such as agglomerative clustering, followed by Gaussian mixture model or k-means clustering. The improvement is present already for single events but it is most pronounced for pile-up. The better performance for minimum bias proton-proton collisions means less lost vertices (one third), very few split, and less fake vertices (one fifth). The number of lost vertex tracks is decreased as well (one fourth). The scaling of the timing and the sensitivity of the proposed method were studied.

Acknowledgements

The author wishes to thank to Wolfgang Adam, Krisztián Krajczár for helpful discussions. This work was supported by the Hungarian Scientific Research Fund and the National Office for Research and Technology (K 48898, H07-B 74296).

References

- [1] A. Badala, et al., Vertex finding in ALICE by the use of silicon pixel layers in the inner tracking system, Nucl. Instrum. Meth. A485 (2002) 100–104. doi:10.1016/S0168-9002(02)00538-7.
- [2] M. J. Costa, Vertex and track reconstruction in ATLAS, Nucl. Instrum. Meth. A582 (2007) 785–789. doi:10.1016/j.nima.2007.10.027.
- [3] W. Adam, Track and vertex reconstruction in CMS, Nucl. Instrum. Meth. A582 (2007) 781–784. doi:10.1016/j.nima.2007.07.091.
- [4] W. H. Press, B. P. Flannery, S. A. Teukolsky, W. T. Vetterling, Numerical Recipes: The Art of Scientific Computing; 3rd ed., Cambridge Univ. Press, Cambridge, 2007.
- [5] P. Franti, T. Kaukoranta, D.-F. Shen, K.-S. Chang, Fast and memory efficient implementation of the exact PNN, Image Processing, IEEE Transactions on 9 (5) (2000) 773–777. doi:10.1109/83.841516.
- [6] T. Sjostrand, S. Mrenna, P. Skands, PYTHIA 6.4 Physics and Manual, JHEP 05 (2006) 026. arXiv:hep-ph/0603175.